

PATENT APPLICATION Express Mail Label No. *EL436467762US* Attorney Docket No. SUN-P5075-RSH

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

<u>UTILITY PATENT</u> <u>APPLICATION TRANSMITTAL LETTER</u>

Asst. Commissioner for Patents Box Patent Application Washington, D.C. 20231

Sir:

Enclosed for filing is an [X] original patent application or, [] a continuation-in-p	oart
patent application, by inventor(s) <u>Grzegorz J. Czajkowski, Mario I. Wolczko</u> , entitled	METHOD AND
APPARATUS TO VERIFY TYPE SAFETY OF AN APPLICATION SNAPSHOT.	

	No. of pages in Application: <u>18</u> ; No. of Claims: <u>21</u> .						
	No. of Sheets of Drawings: Formal: 2, Informal: 0.						
Also en	closed a	are:					
	[]	a claim for foreign priority under 35 U.S.C. §§ 119 and/or 365 in					
		[] a separate document [] the declaration;					
	[] a certified copy of the priority document;						
	[] an Associate Power of Attorney;						
	[] verified statement(s) claiming small entity status;						
	[x] a Combined Declaration and Power of Attorney of the inventors(s);						
	[] a signed Combined Declaration and Power of Attorney of the inventors will follow;						
	[x] an Assignment document and form PTO-1595;						
	[]	a Power of Attorney by Assignee; and					
	[] Information Disclosure Statement and Form PTO-1449.						

The fee has been calculated as follows:

		Carlo	LAIMS	Here	
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE ST
Basic Application	on Fee				\$690.00
Total Claims	21	MINUS 20	1	\$18.00=	\$18.00
Independent Claims	3	MINUS 3 =	0	\$78.00=	\$0.00
If multiple depe	If multiple dependent claims are presented, add \$260.00				
Total Application Fee					\$708.00
If verified statement claiming small entity status is enclosed, subtract 50% of Total Application Fee					
Add Recording Fee of \$40.00 if Assignment document is enclosed					\$40.00
TOTAL APPLICATION FEE DUE					\$748.00

- [X] A check in the amount of \$748.00 is enclosed.
- [] Application fee will follow with missing parts.
- [X] Please deduct any <u>underpayments</u> or credit any <u>overpayments</u> to Deposit Account Number 50-1003.

Please direct all correspondence concerning the above-identified application to the following address:

A. Richard Park
Park & Vaughan LLP
508 Second Street, Suite 201
Davis, CA 95616
(530) 759-1661

22835

PATENT TRADEHARK OFFICE

Respectfully submitted,

By

A. Richard Park

Registration No. 41,241

Date: September 28, 2000

PATENT APPLICATION ATTORNEY DOCKET NO. SUN-P5075-RSH

5

10 METHOD AND APPARATUS TO VERIFY TYPE SAFETY OF AN APPLICATION SNAPSHOT

Inventor(s): Grzegorz J. Czajkowski and Mario I. Wolczko

15

BACKGROUND

Field of the Invention

20

The present invention relates to moving an executing program from one computing device to another computing device. More specifically, the present invention relates to a method and an apparatus for validating that an application snapshot that is moved from one computing device to another computing device has not been corrupted and can be run safely on the second computing device.

25

30

Related Art

The recent proliferation of computer networks such as the Internet has lead to the development of platform-independent computer languages, such as the JAVATM programming language distributed by Sun Microsystems, Inc. of Palo Alto, CA. Programs written in platform-independent languages can be migrated

1

10

15

20

25

from one computing device to another computing device to effect load balancing, check pointing, and portability. In order to migrate code that is currently executing, related information must be moved along with the program code. This related information defines the state of the executing code and can include the code, data objects, and an operand stack. This composite of information is referred to as an "application snapshot."

Sun, the Sun logo, Sun Microsystems, and JAVA are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries.

Current verification methods are static. In existing systems, prior to the beginning of execution on the first computing device, a code verifier ensures, at a minimum, that executing the code creates no operand stack overflows or underflows, that all local variable uses are type safe, and that the arguments to each of the instructions are of valid types. This ensures that the application will remain in a valid state during execution on the first computing device, so that no instruction will cause harm to any other application or data that coexists on the first computing device.

In an execution environment based on a type safe language, such as the JAVA programming language, it is important to ensure that receiving and resuming execution of an application snapshot will not lead to any violations of type safety. In other words, the receiving system must ensure that no invariants and guarantees are compromised.

When the application snapshot migrates across a network to a second computing device, the application snapshot is modified to incorporate changes for the environment that exists on the second computing device, such as different addresses for pointers. After the application snapshot has been modified, a code

verifier, similar to the code verifier on the first computing device, examines the code.

However, note that the code verifier examines only static portions of the application snapshot, namely the code. The code verifier does not examine the non-static portions of the application snapshot, such as the operand stack and data objects to ensure that the state of the application snapshot is consistent with what the state of the application snapshot should be at the point of execution of the code. After examination by the code verifier, execution continues at the point where it was suspended on the first computing device. Since the state of the application snapshot has not been checked to ensure that the state of the application snapshot is consistent with what the state of the application snapshot should be at the point of execution of the code, the system assumes that the application snapshot arrived intact at the second computing device.

While this assumption is usually correct, there are many reasons why the assumption may not be valid. The application snapshot may have been accidentally corrupted as it traveled across the network. Another possibility is that an attacker has modified the application snapshot with malicious intent. In either case, resuming execution of the code on the second computing device can potentially cause damage to data and files, including operating system files.

What is needed is a system that ensures that the application snapshot arrives at the second computing device in a state that will not cause damage to data and files located on the second computing device and will not cause the second computing device to execute code that is not intended to be part of the executing program.

25

5

10

15

20

10

15

20

25

SUMMARY

One embodiment of the present invention provides a system for verifying type safety of an application snapshot. This application snapshot includes a state of an executing program that is moved from a first computing device to a second computing device across a network in order to continue execution on the second computing device. The system operates by receiving the application snapshot from the first computing device on the second computing device, wherein the application snapshot includes a subprogram, an operand stack, and a point of execution. The system then examines the application snapshot to identify one or more subprograms and the point of execution within the subprograms. Next, the system examines the subprogram to determine an expected structure of the operand stack at the point of execution. After the expected structure of the operand stack has been determined, the system verifies that the state of the application snapshot on the second computing device does not violate type safety in the sense of a platform-independent programming language. Execution of the application snapshot is resumed on the second computing device if the verification does not fail.

In one embodiment of the present invention, examining the subprogram to determine the expected structure of the operand stack at the point of execution involves examining the subprogram with a code verifier. This code verifier ensures that the subprogram does not cause the operand stack to overflow and underflow, that using local variables does not violate type safety, and that arguments of instructions are of expected types.

In one embodiment of the present invention, the operand stack contains zero or more local variables, zero or more arguments that are passed as parameters to the subprogram, and an offset to the point of execution within a subprogram.

10

15

In one embodiment of the present invention, the expected structure of the operand stack includes the collective size of entries on the operand stack and the types of entries expected on the operand stack at the point of execution within the subprogram.

In one embodiment of the present invention, the second computing device restores the state of an object within the application snapshot by changing a pointer from an address of the object on the first computing device to an address of the object on the second computing device.

In one embodiment of the present invention, validating the state of the application snapshot includes ensuring that the collective size of entries and the types of entries on the operand stack agree with the collective size of entries and the types of entries expected on the operand stack.

In one embodiment of the present invention, resuming execution of the application snapshot involves restarting the subprogram at the point of execution within the second computing device.

BRIEF DESCRIPTION OF THE FIGURES

- FIG. 1 illustrates computing devices coupled together by a network in accordance with an embodiment of the present invention.
- FIG. 2 illustrates an application snapshot in accordance with an embodiment of the present invention.
 - FIG. 3 is a flowchart illustrating the process of restarting an application snapshot in accordance with an embodiment of the present invention.

25 **DETAILED DESCRIPTION**

The following description is presented to enable any person skilled in the art to make and use the invention, and is provided in the context of a particular

10

15

20

25

application and its requirements. Various modifications to the disclosed embodiments will be readily apparent to those skilled in the art, and the general principles defined herein may be applied to other embodiments and applications without departing from the spirit and scope of the present invention. Thus, the present invention is not intended to be limited to the embodiments shown, but is to be accorded the widest scope consistent with the principles and features disclosed herein.

The data structures and code described in this detailed description are typically stored on a computer readable storage medium, which may be any device or medium that can store code and/or data for use by a computer system. This includes, but is not limited to, magnetic and optical storage devices such as disk drives, magnetic tape, CDs (compact discs) and DVDs (digital versatile discs or digital video discs), and computer instruction signals embodied in a transmission medium (with or without a carrier wave upon which the signals are modulated). For example, the transmission medium may include a communications network, such as the Internet.

Computing Devices

FIG. 1 illustrates computing device 102 and computing device 108 coupled together by network 114 in accordance with an embodiment of the present invention. Computing device 102 and computing device 108 may include any type of computer system, including, but not limited to, a computer system based on a microprocessor, a mainframe computer, a digital signal processor, a personal organizer, a device controller, and a computational engine within an appliance.

Network 114 can include any type of wire or wireless communication channel capable of coupling together computing nodes. This includes, but is not

10

15

20

25

limited to, a local area network, a wide area network, or a combination of networks. In one embodiment of the present invention, network 114 includes the Internet.

Computing device 102 can generally include any node on network 114 including computational capability and including a mechanism for communicating across network 114. During operation, computing device 102 uses platform-independent virtual machine 104 to execute computer program instructions. Prior to executing the computer program instructions, code verifier 106 checks the computer program instructions to ensure that they will not corrupt other data and files located on computing device 102.

Application snapshot 118 defines the state of the executing computer program instructions on computing device 118. At some point in time, computing device 102 transfers application snapshot 118 across network 114 to computing device 108. Application snapshot 118 then becomes application snapshot 120 on computing device 108.

Computing device 108 can generally include any node on network 114 including computational capability and including a mechanism for communicating across network 114. During operation, computing device 108 receives application snapshot 120 from computing device 102 across network 114. Note that application snapshot 118 may be erroneously changed through corruption or by an attacker 116 during transfer to application snapshot 120 across network 114. To ensure that application snapshot 120 will not corrupt other data and files on computing device 108, code verifier 112 checks the computer program instructions within application snapshot 120 to ensure that the computer program instructions will not corrupt other data and files located on computing device 108. Code verifier 112 then retains the expected state of application snapshot 120 for each computer instruction within application snapshot 120 for later use by

snapshot verifier 122 located within platform-independent virtual machine 110 on computing device 108. Snapshot verifier 122 within platform-independent virtual machine 110 on computing device 108 ensures that the state of application snapshot 120 is consistent with the current point of execution of the computer program instructions in application snapshot 120 as is described below.

Application Snapshot

5

10

15

20

25

FIG. 2 illustrates application snapshot 120 in accordance with an embodiment of the present invention. Application snapshot 120 contains, but is not limited to, code 204, objects 206, and stack 208 which define the state of execution of code 204 when taken in combination. Code 204 contains, but is not limited to, subprograms 222, 224, and 226. Subprograms 222, 224, and 226 include, but are not limited to, the functions, subroutines, and methods that comprise the executing program. Objects 206 contains dynamic variables that are created by subprograms 222, 224, and 226 during execution. Stack 208 contains stack frames 210, 212, and 214.

Stack frames 210, 212, and 214 contain data for each open invocation of one of subprograms 222, 224, and 226. Representative stack frame 210 contains point of execution 216, arguments 218, local variables 220, and operand stack 228. Point of execution 216 points to the instruction within code 204 where execution resumes. Arguments 218 and local variables 220 constitute the changing data operated on by the executing subprogram. Local variables 220 and arguments 218 contain pointers to dynamic variables within objects 206. Operand stack 228 contains the operands currently being operated on by the executing subprogram. Each variable within objects 206, arguments 218, local variables 220, and operand stack 228 has an explicit type. Furthermore, application

20

25

5

snapshot 120 has an implicit size based on the size of the components comprising application snapshot 120.

Computing device 108 uses snapshot verifier 122 and the expected state of application snapshot 120 to validate that each variable within objects 206, arguments 218, and local variables 220 is of the proper type. Computing device 108 also uses snapshot verifier 122 and the expected state of application snapshot 120 to validate that the size of application snapshot 120 agrees with the expected size of application snapshot 120.

10 Process of restarting an application snapshot

FIG. 3 is a flowchart illustrating the process of restarting an application snapshot on computing device 108. The system starts when application snapshot 120 is received across network 114 from computing device 102 (step 302). Platform-independent virtual machine 110 restores the operand stacks and objects in application snapshot 120 while changing any platform specific information, such as addresses (step 303). Next, platform-independent virtual machine 110 identifies the subprogram that is being executed and the point of execution within the subprogram (step 304). Platform-independent virtual machine 110 then uses code verifier 112 to ensure that the code will not cause operand stack overflows or underflows, that use of a local variable does not violate type safety, and that an argument of an instruction is of expected type. Code verifier 112 keeps the expected state of application snapshot 120 for each instruction (step 306). Snapshot verifier 122 then validates that the state of application snapshot 120 matches the expected state of application snapshot 120 (step 308). If the state of application snapshot 120 matches the expected state of application snapshot 120 (step 308), execution of application snapshot 120 is resumed on computing device 108 (step 310). If the state of application snapshot 120 does not match the

expected state of application snapshot 120 (step 308), application snapshot 120 is not allowed to resume execution on computing device 108. In addition, notification may be made to an operator or security administrator of computing device 108.

5 Example Attack

As an example of a simple attack, consider the following sequence of Java bytecode instructions associated with, for example, operand stack 228 within application snapshot 120:

10

25

- (1) new Foo
- (2) dup
- (3) invokespecial Foo.<init>()
- (4) ...

Suppose that point of execution 216 was (2) when application snapshot
120 was taken indicating that (1) had just been completed. Operand stack 228
then contains one entry, a reference to an object of type Foo, the object located
within objects 206. If received point of execution 216 is (2), code verifier 112
accepts the method because the code has not changed. Snapshot verifier 122 also
20 accepts application snapshot 120 because operand stack 228 has the proper
number and types of operands.

Now suppose someone tampered with application snapshot 120 by changing point of execution 216 to (3) in order to, possibly, compromise the receiving system's type safety. The received point of execution 216 is (3) in this case. Operand stack 228 should contain two references to an object of type Foo when point of execution 216 is (3) because the dup instruction at (2) would have generated an additional reference. Code verifier 112 again accepts the method

because the code has not changed. In this case, however, snapshot verifier 122 rejects application snapshot 120 because the size of received operand stack 228 does not match the computed size of operand stack 228.

The foregoing descriptions of embodiments of the invention have been presented for purposes of illustration and description only. They are not intended to be exhaustive or to limit the present invention to the forms disclosed.

Accordingly, many modifications and variations will be apparent to practitioners skilled in the art. Additionally, the above disclosure is not intended to limit the present invention. The scope of the present invention is defined by the appended claims.

What Is Claimed Is:

1	1. A method for verifying type safety of an application snapshot, the
2	application snapshot including a state of an executing program that is moved from
3	a first computing device to a second computing device across a network in order
4	to continue execution on the second computing device, the method comprising:
5	receiving the application snapshot from the first computing device on the
6	second computing device, wherein the application snapshot includes a
7	subprogram, an operand stack, and a point of execution;
8	examining the application snapshot to identify the subprogram and the
9	point of execution within the subprogram;
10	examining the subprogram to determine an expected structure of the
11	operand stack at the point of execution;
12	validating that the state of the application snapshot on the second
13	computing device is consistent with the expected structure of the operand stack;
14	and
15	if the state of the application snapshot is validated as consistent with the
16	expected structure of the operand stack, resuming execution of the application
17	snapshot on the second computing device.

- 1 2. The method of claim 1, wherein examining the subprogram to
 2 determine the expected structure of the operand stack at the point of execution
 3 involves examining the subprogram with a code verifier, wherein the code verifier
 4 ensures that:
- the subprogram does not cause the operand stack to overflow and underflow;
 - a use of a local variable does not violate type safety; and

2

3

1

2

3

4

1

2

3

4

5

8	an argument	of an	instruction	is (of an	expected typ	e.
---	-------------	-------	-------------	------	-------	--------------	----

- 3. The method of claim 1, wherein the operand stack contains at least one local variable, at least one argument that is passed as a parameter to the subprogram, and an offset to the point of execution within the subprogram.
- 1 4. The method of claim 2, wherein the expected structure of the 2 operand stack includes a collective size of entries and the types of entries expected 3 on the operand stack at the point of execution within the subprogram.
 - 5. The method of claim 1, further comprising restoring the state of an object within the application snapshot on the second computing device by changing a pointer from an address of the object on the first computing device to an address of the object on the second computing device.
 - 6. The method of claim 4, wherein validating that the state of the application snapshot on the second computing device is consistent with the expected structure of the operand stack involves ensuring that the collective size of entries and the types of entries on the operand stack agree with the collective size of entries and the types of entries expected on the operand stack.
- 7. The method of claim 1, wherein resuming execution of the application snapshot involves restarting the subprogram at the point of execution within the second computing device.
- 1 8. A computer-readable storage medium storing instructions that 2 when executed by a computer causes the computer to perform a method for

3	verifying type safety of an application snapshot, the application snapshot
4	including a state of an executing program that is moved from a first computing
5	device to a second computing device across a network in order to continue
6	execution on the second computing device, the method comprising:
7	receiving the application snapshot from the first computing device on the
8	second computing device, wherein the application snapshot includes a
9	subprogram, an operand stack, and a point of execution;
10	examining the application snapshot to identify the subprogram and the
11	point of execution within the subprogram;
12	examining the subprogram to determine an expected structure of the
13	operand stack at the point of execution;
14	validating that the state of the application snapshot on the second
15	computing device is consistent with the expected structure of the operand stack;
16	and
17	if the state of the application snapshot is validated as consistent with the
18	expected structure of the operand stack, resuming execution of the application
19	snapshot on the second computing device.
1	9. The computer-readable storage medium of claim 8, wherein
2	examining the subprogram to determine the expected structure of the operand
3	stack at the point of execution involves examining the subprogram with a code
4	verifier, wherein the code verifier ensures that:
5	the subprogram does not cause the operand stack to overflow and
6	underflow;
7	a use of a local variable does not violate type safety; and

an argument of an instruction is of an expected type.

3

4

1

2

3

4

5

1

2

3

4

5

6

- 10. The computer-readable storage medium of claim 8, wherein the 2 operand stack contains at least one local variable, at least one argument that is passed as a parameter to the subprogram, and an offset to the point of execution within the subprogram.
- 1 11. The computer-readable storage medium of claim 9, wherein the 2 expected structure of the operand stack includes a collective size of entries and the 3 types of entries expected on the operand stack at the point of execution within the 4 subprogram.
 - 12. The computer-readable storage medium of claim 8, further comprising restoring the state of an object within the application snapshot on the second computing device by changing a pointer from an address of the object on the first computing device to an address of the object on the second computing device.
 - 13. The computer-readable storage medium of claim 11, wherein validating that the state of the application snapshot on the second computing device is consistent with the expected structure of the operand stack involves ensuring that the collective size of entries and the types of entries on the operand stack agree with the collective size of entries and the types of entries expected on the operand stack.
- 1 14. The computer-readable storage medium of claim 8, wherein 2 resuming execution of the application snapshot involves restarting the subprogram 3 at the point of execution within the second computing device.

1	15. An apparatus that facilitates verifying type safety of an application				
2	snapshot, the application snapshot including a state of an executing program that				
3	is moved from a first computing device to a second computing device across a				
4	network in order to continue execution on the second computing device,				
5	comprising:				
6	a receiving mechanism that is configured to receive the application				
7	snapshot from the first computing device on the second computing device,				
8	wherein the application snapshot includes a subprogram, an operand stack, and a				
9	point of execution;				
10	an examination mechanism that is configured to examine the application				
11	snapshot to identify the subprogram and the point of execution within the				
12	subprogram wherein, the examination mechanism is configured to also examine				
13	the subprogram to determine an expected structure of the operand stack at the				
14	point of execution;				
15	a validation mechanism that is configured to validate that the state of the				
16	application snapshot on the second computing device is consistent with the				
17	expected structure of the operand stack; and				
18	an execution mechanism that is configured to resume execution of the				
19	application snapshot on the second computing device if the state of the application				
20	snapshot is validated as consistent with the expected structure of the operand				
21	stack.				
1	16. The apparatus of claim 15, wherein the examination mechanism				
2	includes a code verifier, wherein the code verifier is configured to ensure that:				
3	the subprogram does not cause the operand stack to overflow and				
4	underflow;				
5	a use of a local variable does not violate type safety; and				

2

3

21.

6	an argument of an instruction is of an expected type.
1	17. The apparatus of claim 15, wherein the operand stack contains at
2	least one local variable, at least one argument that is passed as a parameter to the
3	subprogram, and an offset to the point of execution within the subprogram.
1	18. The apparatus of claim 16, wherein the expected structure of the
2	operand stack includes a collective size of entries and the types of entries expected
3	on the operand stack at the point of execution within the subprogram.
1	19. The apparatus of claim 15, further comprising an object restoring
2	mechanism that is configured to restore the state of an object within the
3	application snapshot on the second computing device by changing a pointer from
4	an address of the object on the first computing device to an address of the object
5	on the second computing device.
1	20. The apparatus of claim 18, wherein the validation mechanism is
2	configured to ensure that the collective size of entries and the types of entries on
3	the operand stack agree with the collective size of entries and the types of entries
4	expected on the operand stack.

The apparatus of claim 15, wherein in resuming execution of the

application snapshot, the execution mechanism is configured to restart the

subprogram at the point of execution within the second computing device.

METHOD AND APPARATUS TO VERIFY TYPE SAFETY OF AN APPLICATION SNAPSHOT

ABSTRACT

One embodiment of the present invention provides a system for verifying type safety of an application snapshot. This application snapshot includes a state of an executing program that is moved from a first computing device to a second computing device across a network in order to continue execution on the second computing device. The system operates by receiving the application snapshot from the first computing device on the second computing device, wherein the application snapshot includes a subprogram, an operand stack, and a point of execution. The system then examines the application snapshot to identify one or more subprograms and the point of execution within the subprograms. Next, the system examines the subprogram to determine an expected structure of the operand stack at the point of execution. After the expected structure of the operand stack has been determined, the system verifies that the state of the application snapshot on the second computing device does not violate type safety in the sense of a platform-independent programming language. Execution of the application snapshot is resumed on the second computing device if the verification does not fail.

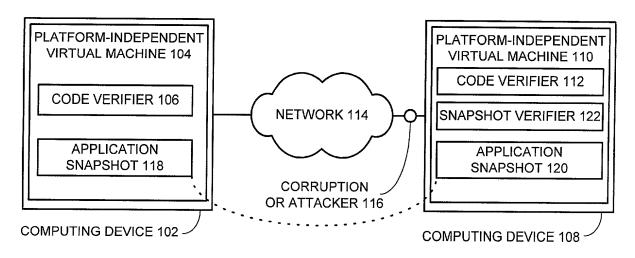


FIG. 1

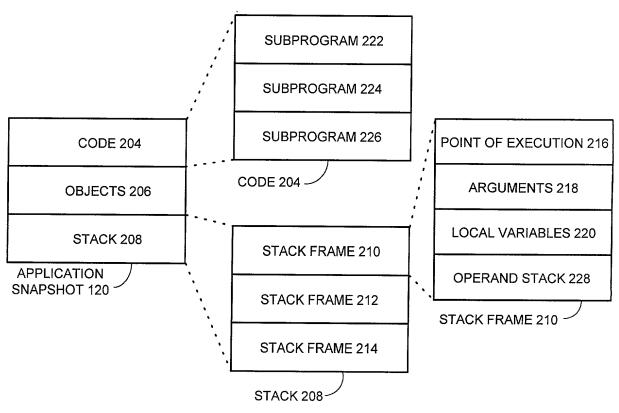


FIG. 2

- Jan 1

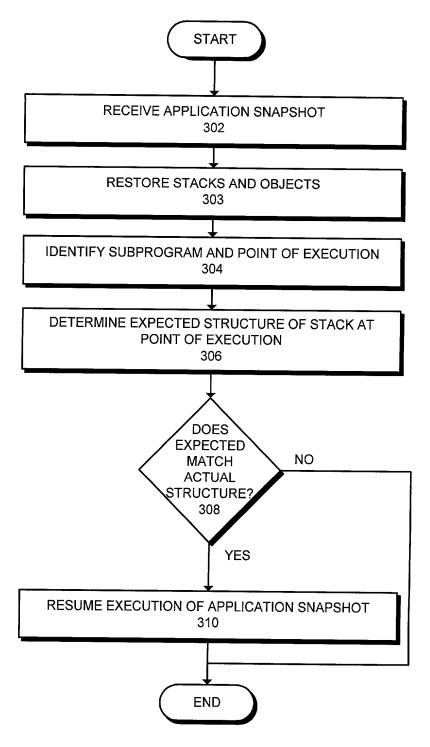


FIG. 3

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below by my name;

I believe I am the original, first and sole inventor, if only one name is listed below, or an original, first and joint inventor if multiple names are listed below, of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND APPARATUS TO VERIFY TYPE SAFETY OF AN APPLICATION SNAPSHOT

was filed in the Unit	ed States on as Application	on No; (if applicable).		
Lhereby state that I have reviewed annended by any amendment refer acknowledge the duty to disclose with Title 37, Code of Federal Re Each individual associated with Office, which includes a duty to this section The duty to disc	and understand the conterred to above. e information known to me gulations, §1.56, which state filing and prosecution of a pate of disclose to the Office all informations all informations known to be a fany claim issued in a patent was nefits under Title 35, Unite pelow and have also identifications.	to be material to the examination tes in relevant part: tent application has a duty of candor and gution known to that individual to be material to patentability is deemed to be sarcited by the Office or submitted to the Office d States Code, §119(a)-(d), of any field below any foreign application	of this application good faith in dealing wi al to patentability as de tisfied if all information fice	n in accordance th the fined in n known on(s) for patent or
EARLIEST FOREIGN AP	PLICATION(S), IF ANY, FI	LED PRIOR TO THE FILING DAT	E OF THE APPLIC	ATION
APPLICATION NUMBER	COUNTRY	DATE OF FILING (Day, Month, Year)	PRIORITY	CLAIMED
			YES 🗌	NO 🗌
I hereby claim the benefit under T			rovisional applicat	ion(s) listed below:
I hereby claim the benefit under T				

APPLICATION NUMBER	DATE OF FILING	STATUS			
AT DICATION NOMBER		PATENTED	PENDING	ABANDONED	

Attorney Docket No. SUN-P5075-RSH

I hereby appoint Daniel E. Vaughan (Reg. No. 42,199) and A. Richard Park (Reg. No. 41,241) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and to file, prosecute and transact all business in connection with international applications directed to said invention.

Address correspondence to:
Park & Vaughan LLP
508 Second Street, Suite 201
Davis, CA 95616

22835
PATENT TRADEMAK OFFICE

Direct telephone calls to: A. Richard Park (530) 759-1661

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, §1001, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1	Name and Citizenship	Grzegorz J. Czajkowski	Poland	
	Residence Address	1339 Park Drive, #6, Mountain View	w, CA 94040	
	Postal Address (if different from Residence)			
E.	Signature and Date	Crikaoni		Date 08/02/00
*	Name and Citizenship	Mario I. Wolczko	United Kingdo	om
	Residence Address	36 Coronado Ave., San Carlos, CA	94070	
	Postal Address (if different from Residence)			
E	Signature and Date	Maio Wojelus		Date 9 13 2000
	Name and Citizenship	0		
	Residence Address			
	Postal Address (if different from Residence)			
	Signature and Date			Date
	Name and Citizenship			
4	Residence Address			
4	Postal Address (if different from Residence)			
	Signature and Date			Date
	Name and Citizenship			
5	Residence Address			
3	Postal Address (1f different from Residence)			
	Signature and Date			Date
		Additional inventor name(s) and	signature(s) attac	:hed?: YES □ NO ☒